


Mineral Core Lead Lined Door

STREK-O

A great name in doors since 1940

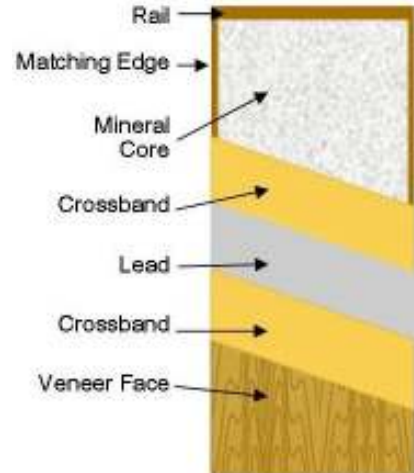

45 Minute Fire Rated

Product Features

Construction:	Fully bonded core		
Core:	Asbestos-free incombustible mineral (blocking available)		
Door Thickness:		<u>Wood Veneer</u>	<u>Plastic Laminate</u>
	1/32" lead	1 3/4"	1 13/16"
	1/16" lead	1 3/4"	1 13/16"
	1/8" lead	1 13/16"	1 15/16"
Maximum Size:		<u>Neutral Pressure</u>	<u>Positive Pressure</u>
	Single	4/0 x 8/0	4/0 x 8/0
	Pair	8/0 x 8/0	8/0 x 8/0
Lead:	Up to 1/8" total thickness		
Stiles:	Per listing agency specifications		
Top & Bottom Rails:	Per listing agency specifications		
Faces:	All veneer species, medium density overlay (MDO), plastic laminate		
Veneer Matching:	Available in pairs (special matching available)		
Crossbands:	High density fiberboard (HDF)		
Adhesives:	Type 1 (waterproof)		
Max Lite Openings:	Metal Vision Frames: (Requires approved lead glass and rated glass) Total area of openings not to exceed 1296 sq. in. of visible glass or one continuous dimension of 36" in width or 54" in height		
Machining/Finishing:	Prefit, bevel, & complete factory machining and factory UV finishing available		
Warranty:	Life of original installation - <i>warranty does not apply for exterior applications</i>		
Specifications:	Meets WDMA & AWI quality standards (contact sales for label approvals)		
Environmental/LEED Options:	MR4-Recycled content/MR6-Rapidly renewable/IEQ4.4-Low-emitting materials (no added urea formaldehyde resins)		