


# Particleboard Core Lead Lined Door

# STREK-O

*A great name in doors since 1940*

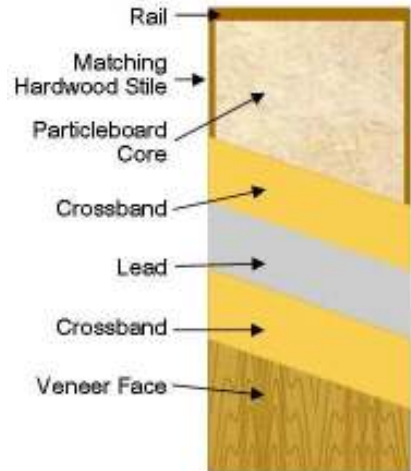

## Non Rated/20 Minute Fire Rated

### Product Features

<b>Construction:</b>	Fully bonded core		
<b>Core:</b>	Bonded particleboard core (conforming to ANSI A 208.1 1 LD-2)		
<b>Door Thickness:</b>	Non-rated	1 3/4"	
	20 Minute	1 3/4"	
<b>Maximum Size:</b>	Single (non-rated)	4/0 x 8/0	
	Pair (non-rated)	8/0 x 8/0	
		<u>Neutral Pressure</u>	<u>Positive Pressure</u>
	Single (20 minute)	4/0 x 8/0	4/0 x 8/0
	Pair (20 minute)	8/0 x 8/0	8/0 x 8/0
<b>Lead:</b>	Up to 1/8" total thickness (other thicknesses available upon request and require different construction)		
<b>Stiles:</b>	1 3/8" prior to factory trimming (other options available)		
<b>Top &amp; Bottom Rails:</b>	4" SCL (wider rails available)		
<b>Faces:</b>	All veneer species, medium density overlay (MDO), plastic laminate		
<b>Veneer Matching:</b>	Available in pairs, sets, & transoms (special matching available)		
<b>Crossbands:</b>	High density fiberboard (HDF)		
<b>Adhesives:</b>	Type 1 (waterproof)		
<b>Max Lite Openings:</b>	<u>Non-rated:</u> Total sq. in. not to exceed 1296. Lite opening dimensions not to exceed 36" in width and 54" in length.		
	<u>20 Minute:</u> Metal Vision Frames: (Requires approved lead glass and rated glass) Total area of openings not to exceed 1296 sq. in. of visible glass or one continuous dimension of 36" in width or 54" in height		
<b>Machining/Finishing:</b>	Prefit, bevel, & complete factory machining and factory UV finishing available		
<b>Warranty:</b>	Life of original installation - <i>warranty does not apply for exterior applications</i>		
<b>Specifications:</b>	Meets WDMA & AWI quality standards (contact sales for label approvals)		
<b>Environmental/LEED Options:</b>	MR4-Recycled content/MR6-Rapidly renewable/IEQ4.4-Low-emitting materials (no added urea formaldehyde resins)		