


Structural Composite Lumber Core Lead Lined Door

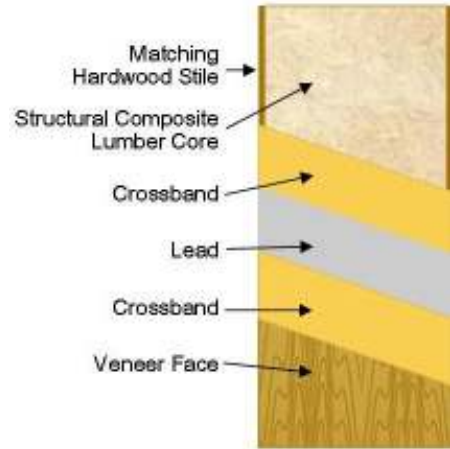

Non Rated/20 Minute Fire Rated

Product Features

Construction:	Fully bonded core		
Core:	Structural composite lumber core		
Door Thickness:	Non-rated	1 3/4"	
	20 Minute	1 3/4"	
Maximum Size:	Single (non-rated)	4/0 x 8/0	
	Pair (non-rated)	8/0 x 8/0	
		<u>Neutral Pressure</u>	<u>Positive Pressure</u>
	Single (20 minute)	4/0 x 8/0	4/0 x 8/0
	Pair (20 minute)	8/0 x 8/0	8/0 x 8/0
Lead:	Up to 1/8" total thickness (other thicknesses available upon request and require different construction)		
Stiles:	7/8" matching hardwood prior to factory trimming (other options available)		
Faces:	All veneer species, medium density overlay (MDO), plastic laminate		
Veneer Matching:	Available in pairs, sets, & transoms (special matching available)		
Crossbands:	High density fiberboard (HDF)		
Adhesives:	Type 1 (waterproof)		
Max Lite Openings:	<u>Non-rated:</u> Total sq. in. not to exceed 1296. Lite opening dimensions not to exceed 36" in width and 54" in length. <u>20 Minute:</u> Metal Vision Frames: (Requires approved lead glass and rated glass) Total area of openings not to exceed 1296 sq. in. of visible glass or one continuous dimension of 36" in width or 54" in height		
Machining/Finishing:	Prefit, bevel, & complete factory machining and factory UV finishing available		
Warranty:	Life of original installation - <i>warranty does not apply for exterior applications</i>		
Specifications:	Meets WDMA & AWI quality standards (contact sales for label approvals)		
Environmental/LEED Options:	MR4-Recycled content/MR6-Rapidly renewable/IEQ4.4-Low-emitting materials (no added urea formaldehyde resins)		