


Fire Rated Mineral Core – Neutral Pressure

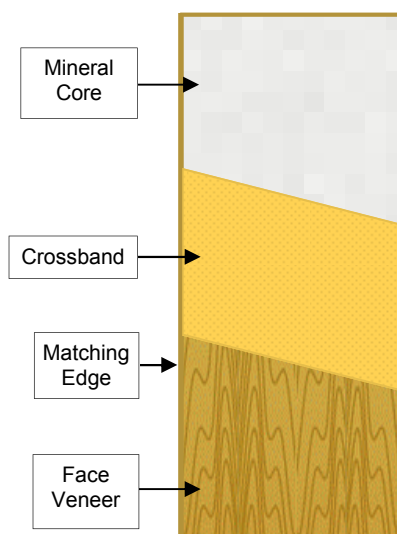

- Fire Rated 45 Minute
- Fire Rated 60 Minute
- Fire Rated 90 Minute

STREK•O
A great name in doors since 1940

Product Features

Construction:	Bonded 5 Ply Hot Press
Core:	Asbestos-Free Incombustible Mineral (Blocking Available)
Door Thickness:	45, 60, 90 Minute 1 3/4"
Maximum Size; ITS-WH & UL:	Single 4/0 x 10/0 Standard Pair 8/0 x 8/0 Double Egress Pair (SFD 45) 8/0 x 8/0 (Require special construction)
Stiles:	Matching Hardwood Edges (Fire Approved)
Top & Bottom Rails:	Top: 1/2" Bottom: 1 7/16" (Wider rails available)
Faces:	All Veneer Species, Medium Density Overlay (MDO)
Veneer Matching:	Available in Pairs, Sets, & Transoms (special matching available)
Crossbands:	High Density Fiberboard (HDF)
Adhesives:	Type 1 (Waterproof)
Max Lite Openings:	<u>Metal Vision Frames:</u> (Requires approved glass) Total area of openings not to exceed 1296 sq. in. of visible glass or one continuous dimension of 36" in width or 54" in height
<i>SFD-90, SFD-60, SFD-45:</i>	<u>Veneer Clad Lite Bead:</u> (Requires approved glass) Total area of openings not to exceed 1296 sq. in. of visible glass or one continuous dimension of 36" in width or 54" in height
<i>SFD-90, SFD-60, SFD-45:</i>	
Machining/Finishing:	Prefit, Bevel, & complete Factory Machining and Factory UV Finishing available
Warranty:	Life of Original Installation - <i>Warranty does not apply for exterior applications</i>
Specifications:	Meets WDMA & AWI quality standards (Contact sales for label approvals)
Environmental/LEED Options:	MR4-Recycled Content/MR5-Regional Materials/MR6-Rapidly Renewable Materials/MR7-Certified Wood/IEQ4.4-Low-Emitting Materials (No added Urea Formaldehyde Resins)