Fire Rated SafeCore® – Positive Pressure (Cat. B)

Positive Pressure with Frame Mounted Intumescent

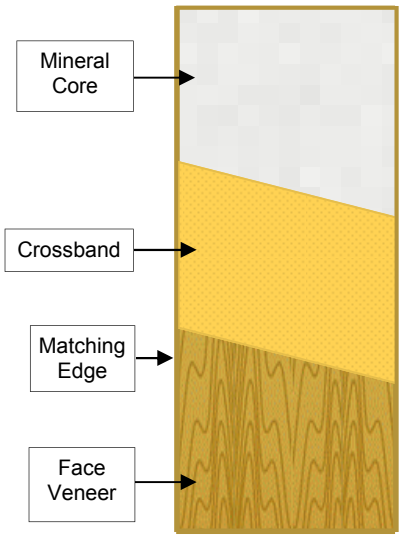

- **Fire Rated 45 / 60 / 90 Minute**

Fire Safe Products

STREK·O

A great name in doors since 1940

Product Features

Construction:	Bonded 5 Ply Hot Press
Core:	Asbestos-Free Incombustible Mineral (Blocking Available)
Door Thickness:	45 / 60 / 90 Minute 1 3/4”
Maximum Size:	Single 4/0 x 8/0 Standard Pair 8/0 x 8/0 (Require special construction)
Stiles: (Wider Stiles Available)	Positive pressure stiles with maximum 15/32” matching hardwood edge (Frame mounted intumescent) Single: 2-3/16” Pairs: Meeting Edge: 5-1/2” Hinge Edges: 2-3/16”
Top & Bottom Rails: (Wider Rails Available)	Maximum 1/4” wood allowed on top rail and bottom rail (1/2” maximum wood allowed on bottom rail of SFD-45PPB) Single: Top: 2-5/8” Bottom: 2-3/8” Pair: Top: 2-5/8” Bottom: 2-3/8” (1/2” maximum wood allowed on bottom rail of SFD-45PPB)
Faces:	All Veneer Species, Medium Density Overlay (MDO)
Veneer Matching:	Available in Pairs, Sets & Transoms (special matching available)
Crossbands:	High Density Fiberboard (HDF)
Adhesives:	Type 1 (Waterproof)
Max Lite Openings: *SFD-45PPB:* *SFD-90PPB, SFD-60PPB:*	Metal Vision Frames: (Requires approved glass) Total area of openings not to exceed 1296 sq. in. of visible glass or one continuous dimension of 36” in width or 54” in height Total area of openings not to exceed 100 sq. in. of visible glass or one continuous dimension of 10” in width or 33” in height
Machining/Finishing:	Prefit, Bevel & complete Factory Machining and Factory UV Finishing available
Warranty:	Life of Original Installation - *Warranty does not apply for exterior applications*
Labeling Approvals:	Intertek Testing Services/Warnock Hersey
Specifications:	Meets WDMA & AWI Quality Standards (Contact sales for label approvals)
Environmental/LEED Options:	MR4-Recycled Content/MR6-Rapidly Renewable Materials/MR7-Certified Wood/IEQ4.4-Low-Emitting Materials (No added Urea Formaldehyde Resins)

518 Birch Street • Abbotsford, WI 54405 • Ph: 715-223-2376 • Fax: 715-223-2377 • www.strekodoors.com
12/22/2009