


Structural Composite Lumber Core Lead Lined Door

STREK•O
A great name in doors since 1940

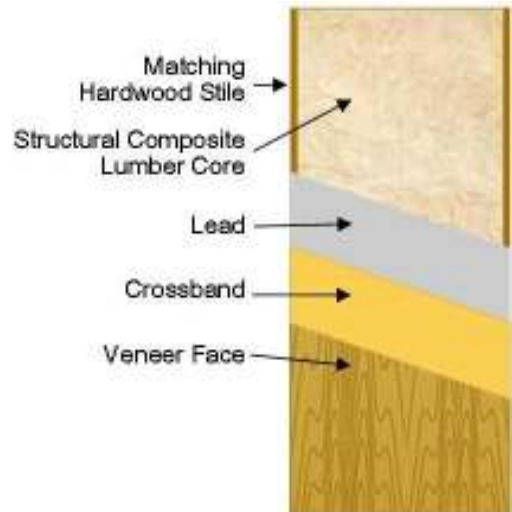

Non Rated - Lead Thicker Than 1/8"

Product Features

Construction:	Fully bonded core
Core:	Structural composite lumber core
Door Thickness:	Over 1/8" to 1/4" lead 1 3/4" Over 1/4" to 3/8" lead 1 13/16"
Maximum Size:	Single (non-rated) 4/0 x 8/0 Pair (non-rated) 8/0 x 8/0
Lead:	Over 1/8" to 3/8" (other thicknesses available upon request)
Stiles:	7/8" matching hardwood prior to factory trimming (other options available)
Faces:	All veneer species, medium density overlay (MDO), plastic laminate
Veneer Matching:	Available in pairs, sets, & transoms (special matching available)
Crossbands:	High density fiberboard (HDF)
Adhesives:	Type 1 (waterproof)
Max Lite Openings:	Inquire with sales
Machining/Finishing:	Prefit, bevel, & complete factory machining and factory finishing available
Warranty:	Life of original installation - <i>warranty does not apply for exterior applications</i>
Specifications:	Meets WDMA & AWI quality standards (contact sales for label approvals)
Environmental/LEED Options:	MR4-Recycled content/MR6-Rapidly renewable/IEQ4.4-Low-emitting materials (no added urea formaldehyde resins)